Module 9: Evaluating Water Quantity Compliance

Module 9 Objectives

After completing this module, you should be able to:

- Review how Curve Numbers are developed and adjusted (from Modules 3 and 5)
- Discuss why and when practitioners may elect to route certain practices
- Describe how the storage at practices can be improved and optimized for quantity control
- Recognize how traditional curve numbers interact with the RRM CNs
- Explain what the Rational Method can be used for

Module 9 Content

9a. Effective Curve Numbers (review)


9b. Practice Routing versus CN Adjustment (practical training)


9c. Enhancing Storage at Practices (practical training)

9d. Spreadsheet CN versus Traditional Curve Numbers (Discussion Provided Below)

9e. Rational and Modified Rational Method – Applications (review)

Note: Sections 9a, 9b, 9c, and 9e are topics covered in more depth in Modules 3 and 5. They will be discussed during course exercises.



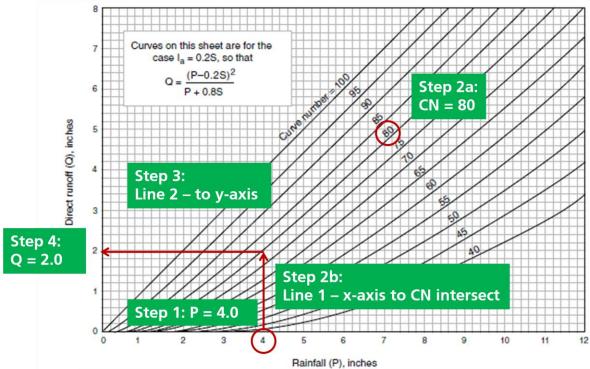


Given a watershed with a CN of 80, what would be the direct runoff (Q) from a rainfall (P) of 4.0 inches?

Review - Tabular Solution (see p. 20 in Module 3)

					Dunof	f donth fo		umbar of	_	Step 2 CN = 8	_		
Rainfall	40	45	50	55	60	65	70	umber of-	80	85	90	95	98
							inches		$\overline{\mathbf{Y}}$				
1.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0 08	0.17	0.32	0.56	0.7
1.2	.00	.00	.00	.00	.00	.00	.03	.07	15	.27	.46	.74	.9
1.4	.00	.00	.00	.00	.00	.02	.06	.13	24	.39	.61	.92	1.1
1.6	.00	.00	.00	.00	.01	.05	.11	.20	34	.52	.76	1.11	1.3
1.8	.00	.00	.00	.00	.03	.09	.17	.29	44	.65	.93	1.29	1.5
Step 1:	.00	.00	.00	.02	.06	.14	.24	.38	56	.80	1.09	1.48	1.7
P = 4.0	.00	.00	.02	.08	.17	.30	Sto	р 3:	89	1.18	1.53	1.96	2.2
= 4.0	.00	.02	.09	.19	.33	.51	1000	= 2.04	1 25	1.59	1.98	2.45	2.7
3.5	.02	.08	.20	.35	.53	.75	1.01	2.04	M64	2.02	2.45	2.94	3.2
(4.0) —	.06	.18	.33	.53	.76	1.03	1.33	1.67	(2.04)	2.46	2.92	3.43	3.7
4.5	.14	.30	.50	.74	1.02	1.33	1.67	2.05	2.46	2.91	3.40	3.92	4.2
5.0			4		. Lab	CNI	-4 00	, wha				4.42	4.

9b. Practice Routing versus CN Adjustment (practical training)

Why are CN adjustments useful?

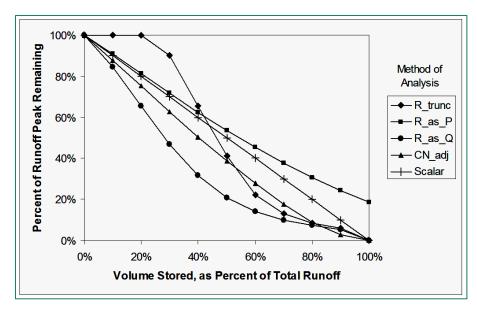

Excerpted from work by Paul R. Koch, Ph.D., P.E.

- Simplified way of reflecting small storage amounts distributed on the landscape
- · Helps to reduce amount of complex modeling

How does the spreadsheet determine (retention) storage?

 Residual volume from upstream BMP contributes to next BMP in treatment train for sizing

ractice	on of Credit	Credit	Credit Area	Volume from Upstream RR Practice (cf)	Runoff Reduction (cf)		Phosphorus	Phosphorus Load from Upstream RR Practices (lbs)	Load to	Phosphorus Removed By Practice (lbs.)	Phosphorus	Downstream Treatment to be Employed
r.a. Illiilliation #1 (Opec #0)	olume reduction	0.50	0.00	0	0	0	25	0.00	0.00	0.00	0.00	
7.b. Infiltration #2 (Spec #8)	olume reduction	0.90	1.00	0	3104	345	25	0.00	2.16	2.00	0.16	8.b. ED #2
T.D. Hilliadion at (open any)	olume reduction	0.90	1.00	0	719	80	25	0.00	0.50	0.46	0.04	8.b. ED #2
Extended Detention Pond								Ru	nof	f		
8.a. ED #1 (Spec #15)	lume reduction	0.00	0.00	0	+	0		Re	duc [.]	tior	.00	
o.a. Lb #1 (Opec #10)	lume reduction	0.00	0.00	0	V	0	15		lum		.00	
8.b. ED #2 (Spec #15)	olume reduction	0.15	1.00	345	569	3224	15	VO	lulli	<u> </u>	.68	
5.5. 25 (Open 110)	olume reduction	0.15	0.00	80	12	68	15	0.04	0.00	0.01	0.03	

What does that volume mean?

- That volume is the estimated fraction of the runoff volume that is reduced annually
- Multiplied by a 1-inch rainfall

Practice	on of Credit		Credit Area (acres)	Volume from Upstream RR Practice (cf)	Runoff Reduction (cf)	Remaining Runoff Volume (cf)	Phosphorus	Phosphorus Load from Upstream RR Practices (lbs)	Load to	Phosphorus Removed By Practice (Ibs.)		Downstream Treatment to be Employed
r.a. Illillitation #1 (Spec #0)	olume reduction	0.50	0.00	0	0	0	25	0.00	0.00	0.00	0.00	
7.b. Infiltration #2 (Spec #8)	olume reduction	0.90	1.00	0	3104	345	25	0.00	2.16	2.00	0.16	8.b. ED #2
1.5. minutation #2 (Opec #0)	olume reduction	0.90	1.00	0	719	80	25	0.00	0.50	0.46	0.04	8.b. ED #2
3. Extended Detention Pond								Ru	nof	f		
8.a. ED #1 (Spec #15)	lume reduction	0.00	0.00	0	+	0		Re	duc [.]	tior	.00	
0.a. 25 #1 (Opec #15)	lume reduction	0.00	0.00	0	V	0	15		lum		.00	
8.b. ED #2 (Spec #15)	olume reduction	0.15	1.00	345	569	3224	15	VO	IuIII	<u> </u>	.68	
5.5. 252 (open into)	olume reduction	0.15	0.00	80	12	68	15	0.04	0.00	0.01	0.03	

9c: Enhancing Storage at Practices (practical training)

What are the limitations?

- For *storage-based* practices
 - o Volume is often much smaller than the actual storage provided
 - Designers may also customize the storage characteristics to reduce flows (more than the spreadsheet can account)

Bioretention Level 1 - Example:

Given:

- Level 1 bioretention
- B type soils
- 2 Acre DA (50% Imp, 50% Turf)

Sizing:

- Tv = volume
- Surface area is 1 Tv divided by storage depth
- Storage depth ~ 1.4 ft. (typical)

Size:

- Tv = 4175 c.f.
- SA = 4175/1.4 = 2982 s.f.
- RR "Credit" = 1379 + 290 = 1669 c.f.
 - o 40% of the volume draining to the facility

6. Bioretention								
6. a. Bioretention #1 or Urban Bioretention	impervious acres draining to bioretention	40% runoff volume reduction	0.40	1.00	0	1379	2069	25
(Spec #9)	turf acres draining to bioretention	40% runoff volume reduction	0.40	1.00	0	290	436	25
6.b. Bioretention #2 (Spec #9)	impervious acres draining to bioretention	80% runoff volume reduction	0.80	0.00	0	0	0	50
o.b. Dioleter Non #2 (Spec #3)	turf acres draining to bioretention	80% runoff volume reduction	0.80	0.00	0	0	0	50

	1-year Storm	z-year storm	IV-year Storm	
	2.60	3.60	4.60	
2.00				
1,670				
0.00				
0				
0.00				
0				
0.00				
0				
0.00				
0				
ected drainage area	as, the spreadsheet	calculates an adjust	ed RV _{Developed} and ad	ljusted Curve Number.
	A soils	B Soils	C Soils	D Soils
Area (acres)	0.00	0.00	0.00	0.00
CN	30	55	70	77
Area (acres)	0.00	1.00	0.00	0.00
CN	39	61	74	80
Area (acres)	0.00		0.00	0.00
CN	98	98	98	98
				Weight a CV S
- D # D - t - "	1-year sterm	2-year storm	10-year storm	
o Runoff Reduction	0.96	1.72	2.55	
th Runoff Reduction		1.49	2.32	
	0.00 0 0.00 0 0.00 0 0.00 0 0 0.00 0 Area (acres) CN Area (acres) CN Area (acres) CN CN	0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0	0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0	0.00

Interim Summary:

Practice is calculated to reduce:

1 year storm volume

From: 0.96 in

To: 0.73 in

For the 2 acre catchment

 $0.96 \times 2 \times 43,560/12 = 6,970 \text{ c.f.}$

 $0.72 \times 2 \times 43,560/12 = 5,227 \text{ c.f.}$


Given total runoff 1-yr = 6970 c.f.

Actual storage greater than 4,175 c.f.

Credit is only 1,669 c.f.

What does this mean?

- Often practices that are storage-based generate much lower discharges than the CN adjustment, if routed
- Expect that designers will route these practices
- CN Reduction for the given practice **AND** Routing are **not** allowed
 - o Be careful to discount the routed practice from CN adjustments **ONLY**

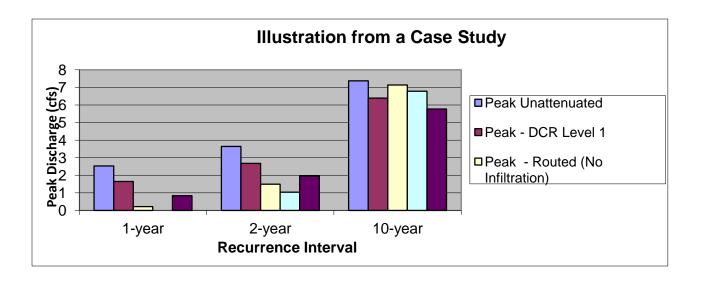


Storage Optimization

Storage can also be customized to reduce discharges for water quantity design. Examples for bioretention customization include:

- Increasing media thickness
- Increasing sump depth
- Increasing ancillary surface storage

Bioretention (Specification No. 9): Optimization and Storage

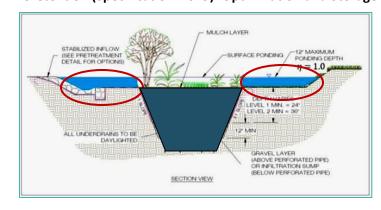

Termin	ology Alert	!!
VRRM	:	TR-55
Managed Turf	=	Open Space
Open Space	=	Woods
It is very important to recognize Open Space different		

The VRRM considers *Managed Turf* to be equivalent to TR-55 *Open Space*:

- Lawns, parks, golf courses, and cemeteries, with a *CN* equivalent to pasture/grassland in good hydrologic condition.
- This generally represents lawn areas that have been cleared and/or graded to accommodate development.

The VRRM considers *Open Space* to be equivalent to TR-55 *Woods*:

- Protected undisturbed (or restored) land, be it forested or undisturbed meadow, with a CN equivalent to woods in good hydrologic condition.
- This generally represents wooded areas as well as protected undisturbed or restored areas of the site with defined operational management criteria.

The VRRM definition of what can be considered *Forest/Open Space* is provided in **Module 4** and includes land that will remain undisturbed OR that will be restored to a hydrologically functional state; as well as land that will be subject to minimal operational and management activities so as to minimize the compaction of soils, the application of fertilizers, and other impacts. In all cases, the designation of lands as *Forest/Open Space* will require some form of a protective covenant.

This is intended to incentivize the minimization of disturbance and the protection and preservation of open space. Combined with the management conditions, these land covers are considered to be functionally equivalent to the TR55 land cover; however, it is intended to be used in the application of the VRRM for crediting purposes and the design of stormwater management structures.

Plan reviewers should be aware of this nomenclature and ensure the correct use in the design
of the stormwater management strategy versus hydrologic analyses related to other
requirements.